

HP SERIES


HIGH PERFORMANCE MOTORS
INTEGRAL DRIVE (HPI RANGE)
STAND ALONE MOTOR (HPS/HPF RANGE)



IE4 IE5 

BROCHURE 2016



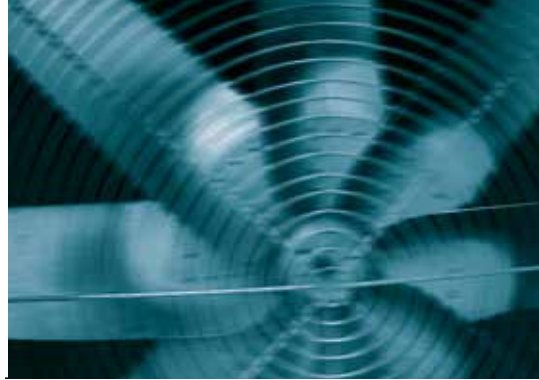

PM IE4 AND IE5 MOTORS MEET KEY INDUSTRY CHALLENGES

Mandatory energy efficiency regulations for energy using products (EuPs) and energy related products (ErPs) have been enforced by the European Union. To meet the upcoming deadlines for the implementation of these regulations, Lafert have developed high efficiency AC motors meeting both IE2 and IE3 levels. Permanent Magnet (PM) electric motors have been developed to meet the IE4 and IE5 levels.

Lafert's current range of PM IE5 motors, named HPS, are based upon **Surface Mounted Permanent Magnet Motor (SMPM) design**. Permanent magnet electric motors typically use rare earth elements such as Samarium and Neodymium in the construction of the magnet elements. The commodity price of such elements has been increasing year on year over the past decade. Therefore, in order to address these market challenges, Lafert have introduced an innovative, cost effective **Interior Permanent Magnet Electric Motor (IPM) design** that will be better positioned to enjoy a key competitive edge. The new IPM design will be launched under the name HPF.

Innovation of the Product

The new sensorless IPM design has been constructed **without the use of rare earth element magnets**. The HPF range from Lafert offers an energy efficient IE4 compliant motor with a sustainable cost base.

Leveraging Leading-Edge Technologies

Lafert's in house servo and AC induction motor design and manufacturing capabilities have facilitated the development of this uniquely engineered product. In order to develop the HP Motor, Lafert used a combination of product designs inspired by the brushless servo motor's electrical design and the AC induction motor's mechanical design.

With higher efficiencies than standard AC induction motors they also enhance the power/weight ratio, thereby allowing for significant **size and weight reductions of up to 50%**.

Lafert place great emphasis on materials research. This has resulted in reduced dependency on rare earth magnets, allowing the use of more readily available permanent magnets, which ensures price and supply stability into the future. Following this development work Lafert have introduced a **second generation of PM Synchronous Motors**, named HPF, achieving **IE4 Super Premium Efficiency** level, with more stable and reduced production costs **without applying rare earth magnets**.

Value Added Features & Benefits

This motor is primarily targeted toward **HVAC applications** in pumps, fans, compressors, and blowers, where there is an emphasis on reducing the operating cost or weight, and size of the motors. Lafert also offer flexibility in terms of design, customising the active and mechanical parts of the motor to suit specific customer requirements.

A **High Performance Integrated (HPI) version** of the product is also available, which includes an integrated drive control system.

RANGE OF PRODUCTS

A RANGE OF SOLUTIONS TO MEET SPECIFIC DEMAND

- **Integral construction** (HPI range) or **stand-alone drive** (HPS/HPF range)
- Sensorless control or with speed transducer
- **IPM** (Interior Permanent Magnets) or **SMPM** (Surface Mounted Permanent Magnets) **design**, depending on the performance demand

GENERAL SPECIFICATIONS

- Wide power output 0.37 to 30 kW
 - three-phase 380-480 V, 50/60 Hz
- Torque: 2 Nm to 100 Nm
- Compact range in IEC frames: 71 - 90 - 112 - 132
- Speed range up to 6000 rpm



CUSTOM MADE CUSTOM PHILOSOPHY



PM MOTORS' AWARDS

**2013 European New Product
Innovation Leadership Award:**
*Electric Motors for Heating
Ventilation Air Conditioning
(HVAC) Applications*
by Frost & Sullivan



**2014 AHR EXPO
Innovation Awards:**
Green Building Category



ADI Index Design 2012:
*Best Italian design
in manufacturing*





NEW GENERATION PM IE4 MOTOR - HPF RANGE

DESIGN

IPM Design - Interior Permanent Magnets

Cost efficient Design - No rare earth magnets - Stable price structure

Controlled by standard drives - Sensorless or closed loop speed control

Innovative high flux density rotor design for high torque density

Available with encoder/resolver or in sensorless execution

Available as stand-alone motor (HPF) or as motor/drive integrated (HPI)

PERFORMANCE

Energy efficiency according to IE4

Increased inertia, low cogging torque for stable high speed control

Improved performance for HVAC applications

Frame size reductions and weight savings up to 40%

TARGET APPLICATIONS

Water Pumps

Fans, Heating and Air Conditioning

Cooling and Air Compressors

Blowers

CURRENT RANGE PM IE5 MOTOR - HPS RANGE

DESIGN

SMPM Design - Surface Mounted Permanent Magnets

High flux rare earth magnets

Controlled by standard drives - Sensorless or closed loop speed control

Magnets shape and placement carefully optimized for higher performance

Available with encoder/resolver or in sensorless execution

Available as stand-alone motor (HPS) or as motor/drive integrated (HPI)

PERFORMANCE

Energy efficiency according to IE5

High performance due to low inertia, high peak torque

Designed for light Servo and higher performance applications

Frame size reductions and weight savings up to 50%


TARGET APPLICATIONS

Cost efficient light Servo Applications


Conveyors, Material Handling

Air Compressors

Vacuum Pumps

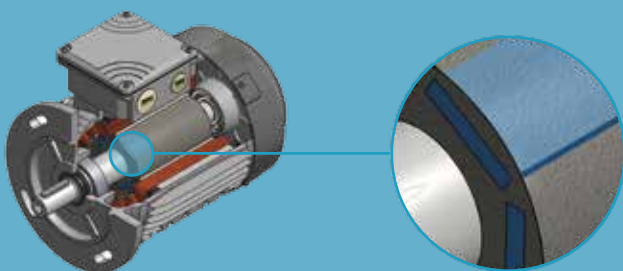

IPM DESIGN
INTERIOR PERMANENT MAGNETS

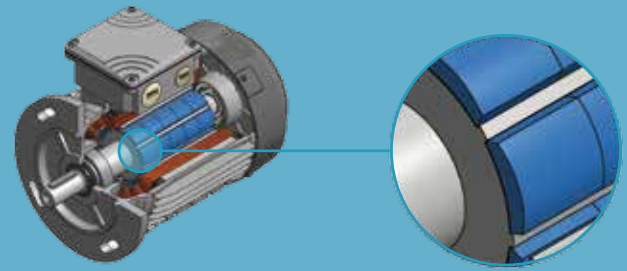

SMPM DESIGN
SURFACE MOUNTED PERMANENT MAGNETS



DRIVE SPECIFICATIONS

MAIN SUPPLY

Supply frequency	50 / 60Hz
Supply voltage	3 x 380/480V ± 10%

OUTPUT RATINGS

Output rated current	100% continuously @ 40°C
Overload capacity	150% for 60 sec 175% for 2 sec

DIGITAL INPUT

Programmable digital input	4
Voltage level	0-24VDC (user selectable npn/pnp)

ANALOG INPUT

Programmable analog voltage input	1
Voltage level	0:10VDC
Programmable analog current input	1
Current range	0:20mA

BUS COMMUNICATION

RS485 or CANbus	for cascade mode
RS485	serial communication
CANbus	CANopen

RELAY OUTPUT

Programmable relay output

PROGRAMMING

Keypad	Yes
PC	Yes

CONTROL SPECIFICATION

Frequency range	up to 400Hz
Control method	Sensorless AC Vector Control
Max PWM frequency	12KHz

EXTERNALS

Enclosure	IP55
Max operating ambient temperature (Full load)	0 - 40°C
Storage ambient temperature	÷ 25°C - 60°C

COMPLIANCE WITH STANDARDS


EN 61800-3:2004	Adjustable speed electrical power drive systems. EMC requirements
IEC 61800-5-1	Adjustable speed electrical drive systems - part 5-1: safety requirements - electrical, thermal and energy
EN 60204-1	Safety of machinery - electrical EMC equipment of machines - part 1: general rules

EFFICIENCY @ 3000RPM

Rated Output [kW]	IEC Motor frame	HP Motor frame	IE3 (IEC 60034-30)	HPS Efficiency [%]	IE3 + FC	HPI Efficiency [%]
0.75	80	71	80.7	89.7	77.5	85.5
1.1	90		82.7	90.5	79.4	86.9
1.5			84.2	91.2	80.8	87.4
2.2	100	90	85.9	91.4	82.5	87.7
3	112		87.1	92.1	83.6	88.4
4	132		88.1	92.6	84.6	88.9
5.5	160		89.2	93.1	85.6	89.4
7.5			90.1	93.7	86.5	90.0
11	180	112	91.2	94.1	87.5	90.3
15	200	132	91.9	94.2	88.2	90.5
18.5			92.4	94.6	88.7	90.8
22			92.7	94.9	89.0	91.1
30			93.3	95.0	89.6	91.2

REDUCTION OF WEIGHT & DIMENSIONS

AC motor size 112

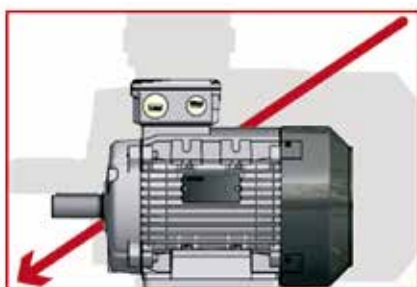

HPS motor size 90

Weight AC Motor

Size 112 - 5.5 kW - 34 Kg

Size 132 - 7.5 kW - 53 Kg

Weight HPS Motor


Size 90 - 5.5 kW - 16 Kg

Size 112 - 7.5 kW - 26 Kg

Type	Rated speed	Rated power	Rated torque	Peak torque	Motor Rated current	Motor Peak current	Efficiency HPI	Rated input current 380 Vac	Rated input current 480 Vac	Torque constant	Weight HPI
	n 1/min	P _n kW	M _n Nm	M _{pk} Nm	I _n Arms	I _{pk} Arms	η %	I _{in} Arms	I _{in} Arms	Kt Nm/A	Kg
3000 min⁻¹											
HPI71 3000 16	3000	0.75	2.4	3.6	1.6	2.4	85.5%	1.7	1.3	1.5	7.3
HPI71 3000 23	3000	1.1	3.5	5.3	2.3	3.5	86.9%	2.4	1.9	1.5	7.9
HPI71 3000 32	3000	1.5	4.8	7.2	3.2	4.8	87.4%	3.3	2.6	1.5	8.5
HPI71 3000 47	3000	2.2	7.0	10.5	4.7	7.0	87.7%	4.8	3.8	1.5	9.1
HPI90 3000 47	3000	2.2	7.0	10.5	4.7	7.0	86.9%	4.8	3.8	1.5	13.5
HPI90 3000 64	3000	3.0	9.6	14.4	6.4	9.6	88.4%	6.4	5.1	1.5	15.5
HPI90 3000 85	3000	4.0	12.7	19.1	8.5	12.7	88.9%	8.5	6.8	1.5	17.5
HPI90 3000 117	3000	5.5	17.5	26.3	11.7	17.5	89.4%	11.7	9.3	1.5	19.5
HPI112 3000 117	3000	5.5	17.5	26.3	11.7	17.5	88.4%	11.9	9.4	1.5	28.5
HPI112 3000 159	3000	7.5	23.9	35.9	15.9	23.9	90.0%	15.9	12.5	1.5	31.5
HPI112 3000 233	3000	11.0	35.0	52.5	23.3	35.0	90.3%	23.2	18.4	1.5	35.5
HPI112 3000 318	3000	15.0	47.8	71.7	31.8	47.8	90.5%	31.5	25.0	1.5	38.5
HPI132 3000 318	3000	15.0	47.8	71.7	31.8	47.8	90.2%	32.1	25.4	1.5	57.5
HPI132 3000 393	3000	18.5	58.9	88.4	39.3	58.9	90.8%	38.8	30.7	1.5	64.5
HPI132 3000 467	3000	22.0	70.0	105.0	46.7	70.0	91.1%	46.1	36.5	1.5	71.5

* For rated speeds 1500 - 1800 - 3600 - 4500 rpm, please refer to the catalogue

HPI FRAME SIZE 71 - 90 - 112 - 132 IM B3* ALUMINIUM ALLOY FRAME

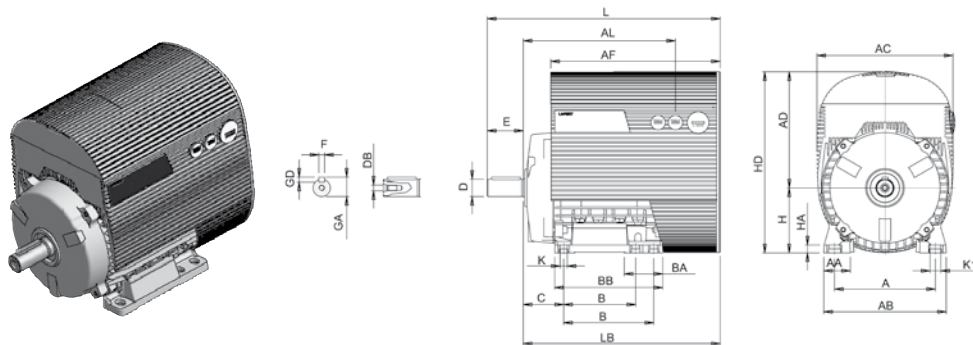

IEC	H	A	B	C	K ¹⁾	AB	BB	AD ²⁾	HD ²⁾	AC	HA
71 ⁴⁾	71	112	90	45	7	144	109	140	211	160	9
90S	90	140	100	56	10	170	150	183	273	196	11
90L	90	140	125	56	10	170	150	183	273	196	11
112	112	190	140	70	12.5	220	176	230	340	246	15
132 ⁴⁾	132	216	178	89	12	256	218	243	375	280	17

IEC	K1	L	LB	AL	AF	BA	AA	D	E	F	GD	GA	DB ³⁾
71 ⁴⁾	17	280	250	200	200	22	30	19	40	6	6	22	M6
90S	15	369	319	254	280	28/53	37	24	50	8	7	27	M8
90L	15	369	319	254	280	28/53	37	24	50	8	7	27	M8
112	19	457	397	332	350	46	48	28	60	8	7	31	M10
132 ⁴⁾	20	545	465	380	415	45	59	38	80	10	8	41	M12


1) Clearance hole for screw 2) Maximum dimension 3) Centering holes in shaft extensions to DIN 332 part 2 4) Not binding dimensions, please contact us for more information.

* For mounting arrangements IM B5 - IM B14, please refer to the catalogue


Type	Size	Rated speed	Rated power	Rated torque	Peak torque	Voltage constant	Torque constant	BEMF at rated speed	Rated current	Efficiency HPS	Weight
		n /min	P _n kW	M _n Nm	M _{pk} Nm	K _e Vs	K _t Nm/A	E _n Vrs	I _n Arms	η %	Kg
3000 min⁻¹											
HPS71 3000 16	71	3000	0.75	2.4	7.2	0.87	1.5	272	1.6	89.7%	4.8
HPS71 3000 23	71	3000	1.1	3.5	10.5	0.87	1.5	272	2.3	90.5%	5.4
HPS71 3000 32	71	3000	1.5	4.8	14.3	0.87	1.5	272	3.2	91.2%	6.0
HPS71 3000 47	71	3000	2.2	7.0	21.0	0.87	1.5	272	4.7	91.4%	6.6
HPS90 3000 47	S-L	3000	2.2	7.0	21.0	0.87	1.5	272	4.7	91.5%	10
HPS90 3000 64	S-L	3000	3.0	9.6	28.7	0.87	1.5	272	6.4	92.1%	12
HPS90 3000 85	S-L	3000	4.0	12.7	38.2	0.87	1.5	272	8.5	92.6%	14
HPS90 3000 117	S-L	3000	5.5	17.5	52.5	0.87	1.5	272	11.7	93.1%	16
HPS112 3000 117	M	3000	5.5	17.5	52.5	0.87	1.5	272	11.7	92.9%	23
HPS112 3000 159	M	3000	7.5	23.9	71.6	0.87	1.5	272	15.9	93.7%	26
HPS112 3000 233	M	3000	11.0	35.0	105.1	0.87	1.5	272	23.3	94.1%	30
HPS112 3000 318	M	3000	15.0	47.8	143.3	0.87	1.5	272	31.8	94.2%	33
HPS132 3000 318	M	3000	15.0	47.8	143.3	0.87	1.5	272	31.8	93.8%	51
HPS132 3000 393	XL	3000	18.5	58.9	176.7	0.87	1.5	272	39.3	94.6%	58
HPS132 3000 467	XXL	3000	22.0	70.0	210.1	0.87	1.5	272	46.7	94.9%	65
HPS132 3000 636	XXL	3000	30.0	95.4	286.0	0.87	1.5	272	63.6	95.0%	72

* For rated speeds 1500 - 1800 - 3600 - 4500 rpm, please refer to the catalogue


HPS FRAME SIZE 71 - 90 - 112 - 132 IM B3* ALUMINIUM ALLOY FRAME

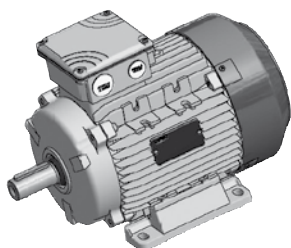

71 to 112 frame

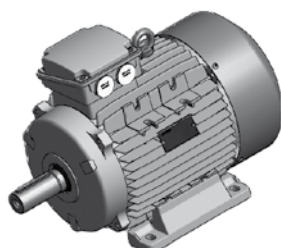

132 frame

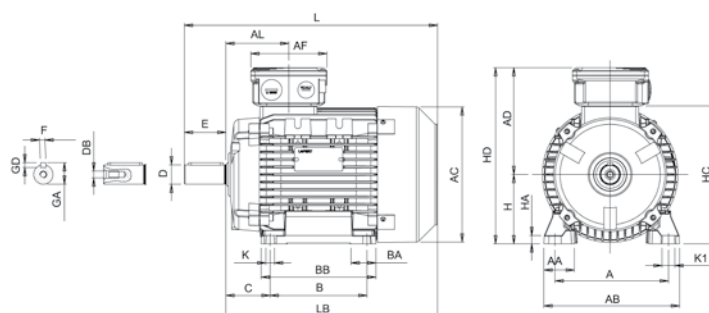

IEC	H	A	B	C	K ¹⁾	AB	BB	AD ²⁾	HD ²⁾	AC	HC	HA
71	71	112	90	45	8	135	108	114	185	142	142	9
90S	90	140	100	56	10	170	150	148	238	177	181	11
90L	90	140	125	56	10	170	150	148	238	177	181	11
112M	112	190	140	70	12.5	220	176	171	283	225	226	15
112XL	112	190	140	70	12.5	220	176	171	283	225	226	15
132M	132	216	178	89	12	256	218	195	327	248	261	17
132XL	132	216	178	89	12	256	218	195	327	248	261	17
132XXL	132	216	178	89	12	256	218	195	327	248	261	17

IEC	K1	L	LB	AL	AF	BA	AA	D	E	F	GD	GA	DB ³⁾
71	17	245	215	75	93	22	30	19	40	6	6	22	M6
90S	15	317	267	85	110	28/53	37	24	50	8	7	27	M8
90L	15	317	267	85	110	28/53	37	24	50	8	7	27	M8
112M	19	388	328	92	110	46	48	28	60	8	7	31	M10
112XL	19	410	350	92	110	46	48	28	60	8	7	31	M10
132M	20	485	405	122	133	45	59	38	80	10	8	41	M12
132XL	20	505	425	122	133	45	59	38	80	10	8	41	M12
132XXL	20	556	476	122	133	45	59	38	80	10	8	41	M12

1) Clearance hole for screw

2) Maximum dimension

3) Centering holes in shaft extensions to DIN 332 part 2

* For mounting arrangements IM B5 - IM B14, please refer to the catalogue

